



Designation: D4470 – 18 (Reapproved 2025)

Standard Test Method for Static Electrification¹

This standard is issued under the fixed designation D4470; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This test method covers the generation of electrostatic charge, the measurement of this charge and its associated electric field, and the test conditions which must be controlled in order to obtain reproducible results. This test method is applicable to both solids and liquids. This test method is not applicable to gases, since a transfer of a gas with no solid impurities in it does not generate an electrostatic charge. This test method also does not cover the beneficial uses of static electrification, its associated problems or hazards, or the elimination or reduction of unwanted electrostatic charge.²

1.2 The values stated in SI units are to be regarded as the standard.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.4 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 *ASTM Standards:*³

D618 Practice for Conditioning Plastics for Testing

D1711 Terminology Relating to Electrical Insulation

D5032 Practice for Maintaining Constant Relative Humidity

¹ This test method is under the jurisdiction of ASTM Committee D09 on Electrical and Electronic Insulating Materials and is the direct responsibility of Subcommittee D09.12 on Electrical Tests.

Current edition approved Dec. 1, 2025. Published December 2025. Originally approved in 1985. Last previous edition approved in 2018 as D4470 – 18. DOI: 10.1520/D4470-18R25.

² Vosteen, R. E., and Bartnikas, R., Chapter 5, “Electrostatic Charge Measurements,” *Engineering Dielectrics, Vol. IIB, Electrical Properties of Solid Insulating Materials, Measurement Techniques*, R. Bartnikas, Editor, ASTM STP 926, ASTM, Philadelphia, 1987.

³ For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at www.astm.org/contact. For *Annual Book of ASTM Standards* volume information, refer to the standard’s Document Summary page on the ASTM website.

by Means of Aqueous Glycerin Solutions
E104 Practice for Maintaining Constant Relative Humidity
by Means of Aqueous Solutions

3. Terminology

3.1 *Definitions:*

3.1.1 For definitions of terms used in this specification, refer to Terminology D1711.

3.1.2 *conducting material (conductor), n*—a material within which an electric current is produced by application of a voltage between points on or within the material.

3.1.2.1 *Discussion*—The term “conducting material” is usually applied only to those materials in which a relatively small potential difference results in a relatively large current since all materials appear to permit some conduction current. Metals and strong electrolytes are examples of conducting materials.

3.1.3 *electric field strength, n*—the magnitude of the vector force on a point charge of unit value and positive polarity.

3.1.4 *excess electrostatic charge, n*—the algebraic sum of all positive and negative electric charges on the surface of, or in, a specific volume.

3.1.5 *insulating material (insulator), n*—a material in which a voltage applied between two points on or within the material produces a small and sometimes negligible current.

3.1.6 *resistivity, surface, n*—the surface resistance multiplied by that ratio of specimen surface dimensions (width of electrodes defining the current path divided by the distance between electrodes) which transforms the measured resistance to that obtained if the electrodes formed the opposite sides of a square.

3.1.6.1 *Discussion*—Surface resistivity is expressed in ohms. It is popularly expressed also as ohms/square (the size of the square is immaterial). Surface resistivity is the reciprocal of surface conductivity.

3.2 *Definitions of Terms Specific to This Standard:*

3.2.1 *apparent contact area, n*—the area of contact between two flat bodies.

3.2.1.1 *Discussion*—It is the area one would calculate by measuring the length and width of the rectangular macroscopic contact region.

3.2.2 *dissipative material, n*—a material with a volume resistivity greater than 10^4 ohm-cm and less than 10^{12} ohm-cm,

a resistivity range between conductive and insulating material as defined in this test method.

3.2.3 *real contact area, n*—the regions of contact between two bodies through which mechanical actions or reactions are transferred.

3.2.3.1 *Discussion*—Since real bodies are never perfectly smooth, at least on a microscopic scale, the real contact area of apparently flat materials is always less than the apparent contact area.

3.2.4 *triboelectric charge generation*—the formation, with or without rubbing, of electrostatic charges by separation of contacting materials.⁴

4. Significance and Use

4.1 Whenever two dissimilar materials are contacted and separated, excess electrostatic charge (triboelectric charge) will be found on these materials if at least one of the materials is a good insulator. This excess charge gives rise to electric fields which can exert forces on other objects. If these fields exceed the breakdown strength of the surrounding gas, a disruptive discharge (spark) can occur. The heat from this discharge can ignite explosive atmospheres, the light can fog photosensitized materials, and the current flowing in a static discharge can cause catastrophic failure of solid state devices. Electric forces can be used beneficially, as in electrostatic copying, spray painting and beneficiation of ores. They can be detrimental as when they attract dirt to a surface or when they cause sheets to stick together. Since most plastic materials in use today have very good insulating qualities, it is difficult to avoid generation of static electricity. Since it depends on many parameters, it is difficult to generate static electricity reliably and reproducibly.

5. Apparatus

5.1 *Charging Mechanisms*—The charging mechanisms can be constructed in a variety of ways; preferably it will be made as analogous to the particular application as possible. Some examples of charging mechanisms are described in 5.1.1, 5.1.2, and 5.1.3.

5.1.1 *Powder or Liquids Transported Through Tubes or Down Troughs*—Contact between the specimen and wall of the tube will charge the specimen or the tube, or both. Either the specimen or the tube must be insulating, or partially insulating. When the specimen is separated from the tube, electrostatic charge will be generated. This charge can be measured by catching a known amount of the specimen in a Faraday cage, or measuring the charge remaining on the tube. It is permissible for trough to be substituted for the tube and gravity used to affect the movement of the specimen along the trough.

5.1.2 *Webs Transported Over Rollers*—Contact between the web and the roller surface will charge the web if it is an insulator or partial insulator. If the rollers are insulators or partial insulators they will become charged thus lowering, or eliminating, the charge transfer to the web after a period of time. The electric field on the web can be measured with a

fieldmeter, or the charge on the web can be measured with a cylindrical Faraday cage if the width of the web is not too large.

5.1.3 *Transport of Insulating or Partially Insulating Sheet Material*—Sheet materials are able to be transported on air layers, by sliding down chutes, by vacuum platens, and by pinch rollers. Of these types of transport, pinch rollers and sliding down chutes generate the largest amount of charge. Generally, the better the contact (larger real contact area), the greater will be the charge generated. Pinch rollers are usually a high pressure, small apparent area of contact, leading to a relatively large real area of contact between the sheet and rollers. Sliding serves to multiply the real area of contact over that which would be obtained with a contact without sliding.

5.2 *Electrostatic Charge Measurements*—Fig. 1 shows a block diagram of the typical components necessary for this measurement while Fig. 2 shows a schematic diagram.

5.2.1 *Faraday Cage*—The Faraday cage consists of two conducting enclosures, one enclosed and insulated from the other. The inner enclosure is electrically connected to the shunt capacitors and the electrometer input. It is insulated from the outer enclosure by rigid, very high resistance, insulators which have resistance practically independent of relative humidity (an example is polytetrafluoroethylene (PTFE)). The inner enclosure shall be of such construction that the test specimen can be substantially surrounded by it. The outer enclosure is connected to ground and serves to shield the inner enclosure from external fields which could affect the measurement.

5.2.2 *Shunt Capacitors*—It is possible shunt capacitors will be necessary to reduce the measured voltage to a range where it can be read by the electrometer. Such shunt capacitors must have very low leakage insulation relatively unaffected by relative humidity changes (for example, polystyrene). Keep them short-circuited when not in use and protected from high relative humidity.

5.2.3 *Electrometer*—The electrometer voltmeter measures the voltage developed on the Faraday cage and shunt capacitors. The electrometer must have a high impedance (such as 100 TΩ or higher) and a low drift rate concordant with the time of measurement. Electrometers are available with built-in shunt capacitors selected by a range switch. Electrometers are also available with negative feedback circuits which minimize the effect of input capacity. These circuits reduce the input voltage drop to nearly zero minimizing the effects of leakage of charge to ground and polarization of insulators.

5.2.4 *Display Unit*—The display unit indicates the voltage developed on the electrometer. If the input capacitance is known and does not vary, or if negative feedback is used, the

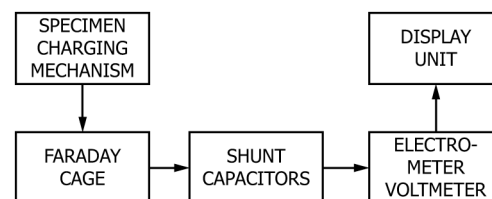


FIG. 1 Block Diagram of Apparatus for Measurement of Electrostatic Charge

⁴ Shashoua, V. E., "Static Electricity in Polymers: Theory and Measurement," *Journal of Polymer Science*, Vol XXXIII, 1958, pp 65–85.