



Designation: D7469 – 23

Standard Test Methods for End Joints in Structural Wood Products¹

This standard is issued under the fixed designation D7469; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

INTRODUCTION

Adhesive bonded end joints are used in structural glued wood products. The bond performance of these end joints is only one of several parameters that influence the in-service performance of these products. Evaluating the performance of these end joints require specific tests.

The testing regimen, which consists of one or more of the test methods specified in this standard, is dependent on the type of product, the stage in the manufacturing of the product or sub-components when the testing is to be performed, and the objective of the evaluation. [Appendix X1 – Appendix X7](#) provide an overview of considerations for developing a testing regimen.

1. Scope

1.1 This standard provides test methods for evaluating the structural capacity and integrity of end joints in structural wood products.

1.2 Off-line test methods include: (1) Axial Tension, (2) Bending, and (3) Cyclic Delamination.

1.3 In-line test methods include: (1) Tension Proofload and (2) Bending Proofload.

1.4 The values stated in inch-pound units are to be regarded as standard. The values given in parentheses are mathematical conversions to SI units that are provided for information only and are not considered standard.

1.5 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.6 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

¹ These test methods are under the jurisdiction of ASTM Committee D07 on Wood and are the direct responsibility of Subcommittee D07.01 on Fundamental Test Methods and Properties.

Current edition approved Nov. 15, 2023. Published December 2023. Originally approved in 2008. Last previous edition approved in 2022 as D7469 – 22. DOI: 10.1520/D7469-23.

2. Referenced Documents

2.1 *ASTM Standards:*²

- [D9 Terminology Relating to Wood and Wood-Based Products](#)
- [D198 Test Methods of Static Tests of Lumber in Structural Sizes](#)
- [D1101 Test Methods for Integrity of Adhesive Joints in Structural Laminated Wood Products for Exterior Use](#)
- [D1151 Practice for Effect of Moisture and Temperature on Adhesive Bonds](#)
- [D1183 Practices for Resistance of Adhesives to Cyclic Laboratory Aging Conditions](#)
- [D2559 Specification for Adhesives for Bonded Structural Wood Products for Use Under Exterior Exposure Conditions](#)
- [D2915 Practice for Sampling and Data-Analysis for Structural Wood and Wood-Based Products](#)
- [D3434 Test Method for Multiple-Cycle Accelerated Aging Test \(Automatic Boil Test\) for Exterior Wet Use Wood Adhesives](#)
- [D4442 Test Methods for Direct Moisture Content Measurement of Wood and Wood-Based Materials](#)
- [D5456 Specification for Evaluation of Structural Composite Lumber Products](#)
- [D4688 Test Method for Evaluating Structural Adhesives for Finger Jointing Lumber](#)

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

D4761 Test Methods for Mechanical Properties of Lumber and Wood-Based Structural Materials
D7247 Test Method for Evaluating the Shear Strength of Adhesive Bonds in Laminated Wood Products at Elevated Temperatures
D7438 Practice for Field Calibration and Application of Hand-Held Moisture Meters
E4 Practices for Force Calibration and Verification of Testing Machines
E6 Terminology Relating to Methods of Mechanical Testing
E177 Practice for Use of the Terms Precision and Bias in ASTM Test Methods

3. Terminology

3.1 Terms used in these methods shall be as defined in Terminologies **D9** and **E6** and Practices **E4** and **E177**.

3.2 *Definitions of Terms Specific to This Standard:*

3.2.1 *delamination, n*—separation of a bondline due to dimensional changes (swelling and shrinkage) of the wood around the joint caused by extreme changes in the moisture content.

3.2.2 *end joint, n*—joint formed by adhesive bonding of machined, mated surfaces at the ends of two pieces of a structural wood product.

3.2.2.1 *Discussion*—Typical end joint configurations include finger joints and scarf joints.

3.2.3 *end-joint specimen, n*—assembly including one or more end joints of the structural wood product.

3.2.4 *finger joint, n*—end joint formed by multiple interlocking tapered profiles (“fingers”) (**Fig. 1**).

3.2.5 *finger length, n*—length of machined finger along the longitudinal axis of the full-size member from the finger tip to the base of the finger (**Fig. 1**).

3.2.6 *finger pitch, n*—distance from a point on one finger to a corresponding point on the adjacent finger measured perpendicular to the length of the finger (**Fig. 1**).

3.2.7 *gauge length, n*—clear distance between the grips for a specimen subjected to axial tensile loading.

3.2.8 *horizontal finger joint, n*—finger joint where the finger profile appears only on the narrow face of the structural wood product.

3.2.9 *in-line test, n*—a test that is carried out on all production from a continuous manufacturing process.

3.2.10 *joint misalignment, n*—non-zero slope between the longitudinal axes of two adjoining pieces in the direction of depth or thickness, or both.

3.2.11 *joint offset, n*—distance between joint profile surfaces of two adjoining pieces in a cross-sectional direction perpendicular to the finger or scarf joint length.

3.2.12 *off-line test, n*—test that is carried out on a sample taken from a continuous manufacturing process or from inventory of the product.

3.2.13 *outer finger, n*—finger at the edges of the face showing the finger profile (**Fig. 1**).

3.2.14 *proofload testing, n*—test where a preselected load or stress level is applied to the specimen.

3.2.15 *scarf joint, n*—end joint formed by a single tapered profile (**Fig. 2**).

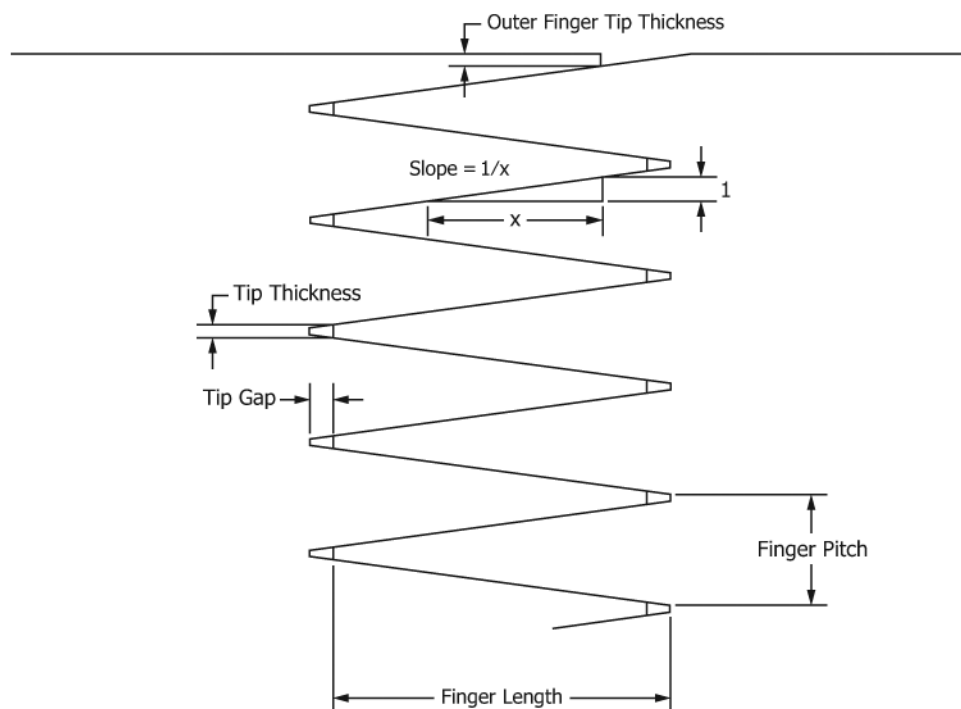


FIG. 1 Finger Joint Profile