



Designation: F1692 – 01 (Reapproved 2023)

Standard Test Method for Life Evaluation of a Turbine-Powered Nozzle for Household Central Vacuum Cleaning Systems¹

This standard is issued under the fixed designation F1692; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This test method covers the turbine-powered nozzle used in household central vacuum cleaning systems.

1.2 This test method provides a test for determining the operating turbine life in hours by an accelerated laboratory procedure. The turbine is tested while mounted and operated in the power nozzle.

1.3 This test method covers only the turbine-powered nozzle. The system used to provide the airflow source is not under consideration.

1.4 This test method is limited to the determination of turbine life for a household turbine-powered nozzle.

1.5 The values stated in inch-pound units are to be regarded as the standard. The values given in parentheses are for information only.

1.6 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.7 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 *ASTM Standards:*²

D75 Practice for Sampling Aggregates

E337 Test Method for Measuring Humidity with a Psy-

chrometer (the Measurement of Wet- and Dry-Bulb Temperatures)

F431 Specification for Air Performance Measurement Plenum Chamber for Vacuum Cleaners

F608 Test Method for Evaluation of Carpet Embedded Dirt Removal Effectiveness of Household/Commercial Vacuum Cleaners

F655 Specification for Test Carpets and Pads for Vacuum Cleaner Testing (Withdrawn 2022)³

3. Terminology

3.1 *Definitions of Terms Specific to This Standard:*

3.1.1 *turbine stoppage*—for turbine-powered nozzles, any failure integral with the turbine assembly such as housing(s), bearings, or any other component judged to be integral with the turbine.

4. Significance and Use

4.1 The test results provide an indication of the turbine-powered nozzle life. The end of turbine life will be judged in accordance with 3.1.1.

5. Apparatus and Materials

5.1 *Voltage Regulator System*—to control the input voltage to the vacuum cleaner or airflow source. The regulator must be capable of maintaining the vacuum cleaner or the airflow source's rated voltage $\pm 1\%$ and rated frequency ± 1 Hz with a waveform that is essentially sinusoidal with 3 % maximum harmonic distortion for the duration of the test.

5.2 *Voltmeter*, to provide measurements accurate to within $\pm 1\%$.

5.3 *Timer and Switch*, having the capacity to control the off/on duty cycle of the nozzle and airflow source during the life test.

5.4 *Wattmeter*, to provide measurements accurate to within $\pm 1\%$.

5.5 *Sharp-Edge Orifice Plate*—The orifice, 1¼-in. (32-mm) diameter, shall be in accordance with the orifice plate illustrated in Specification **F431**.

¹ This test method is under the jurisdiction of ASTM Committee **F11** on Vacuum Cleaners and is the direct responsibility of Subcommittee **F11.30** on Durability-Reliability.

Current edition approved Sept. 1, 2023. Published September 2023. Originally approved in 1996. Last previous edition approved in 2016 as F1692 – 01 (2016). DOI: 10.1520/F1692-01R23.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ The last approved version of this historical standard is referenced on www.astm.org.

5.6 *Plenum Chamber*, conforming to the plenum chamber specifications stated in Specification F431.

5.7 *Water Manometer*, or equivalent instrument, measuring in increments of 0.1 in. (2.54 mm).

5.8 *Barometer*, with an accuracy of ± 0.05 in. (1.27 mm) Hg, capable of measuring uncorrected barometric pressure (test station pressure) with scale divisions of 0.02 in. (0.51 mm) or finer.

5.9 *Thermometer*, having a range from at least 18 °F to 80 °F (−8 °C to +27 °C) and graduated in 1 °F (0.5 °C) increments.

5.10 *Psychrometer*, meeting the requirements of Test Method E337, with thermometers graduated in increments of 1 °F (0.5 °C).

5.11 *Test Carpet*, conforming to the specifications for level loop carpet as described in Specification F655. A carpet that provides equivalent nozzle loading results may be used.

5.12 *Test Carpet Padding*, conforming to the padding described in Specification F655.

5.13 *Test Cleaner or Airflow Source*—The turbine nozzle life evaluation tests shall be conducted using the airflow source and voltage resulting from the components that compose the combination system with which the turbine nozzle is to be used. If used with several systems, the one with the maximum airflow shall be used.

5.13.1 *Option*—A simulated airflow source and adjusted voltage may be used if they are equal to or exceed the central vacuum cleaning system with which the turbine nozzle is to be used.

5.14 *Test Fixture*—A moving surface, covered by the test carpet supported on the test pad, which moves with a horizontal reciprocating motion, for a stroke distance of 27 in. (686 mm) in each direction at the average rate of 1.8 ft/s (0.55 m/s), resulting in 24 cpm (forward and back). This motion shall be generated by rotating a 13.5-in. (343-mm) radius arm that shall be connected to the platform with a suitable link (see Fig. 1). This device shall provide means to hold the turbine nozzle fixed securely by its handle in the operating position while it is in contact with the reciprocating surface. The turbine nozzle

shall be restrained suitably in the horizontal operating plane yet allowed freedom of movement in the vertical plane for operation.

5.14.1 *Option*—The turbine nozzle can be subjected to the same cycle as stated in 5.14 while the carpeted platform is held stationary (see Fig. 1).

5.14.2 For either option, the reciprocating motion shall follow the same duty cycle as specified for the vacuum cleaner or airflow source and turbine nozzle in 7.7.

5.14.3 The turbine nozzle's airflow source shall be stationary and positioned so that the hose will be submitted to minimum stress.

5.15 *Test Dirt*, Wedron sand/talc mixture. See Annex A1.

6. Sampling

6.1 Test a minimum of three units (or a larger sample size, if desired) of similar models using the same motor style and amperage. Select all samples at random in accordance with good statistical practice. Results shall provide an 80 % confidence level with ± 10 % of the mean value. If not, test additional samples or reduce the results of the penalty factor as calculated in 7.12.

7. Procedure for Turbine Life Evaluation

7.1 Determine the initial performance. The suction of the cleaner or airflow source, with the turbine nozzle attached, is to be determined and will be used to ensure that no leaks develop to reduce the load on the nozzle during the test. For this initial test, the nozzle opening is to be sealed to the ASTM plenum chamber with the manometer (or equivalent) connected to the plenum chamber. The turbine nozzle is to have the agitator drive connected and a new filter bag in the cleaner or airflow source. The agitator shall be operating freely, with the handle in operating position, as shown in Fig. 1.

7.1.1 With the turbine nozzle opening sealed to the plenum chamber and without an orifice plate in the holder, energize the cleaner or airflow source at its rated voltage ± 1 % and rated frequency ± 1 Hz for 5 min. For vacuum cleaners with dual nameplate voltage ratings, conduct the testing at the highest voltage. See 5.13 if an optional airflow source is used.

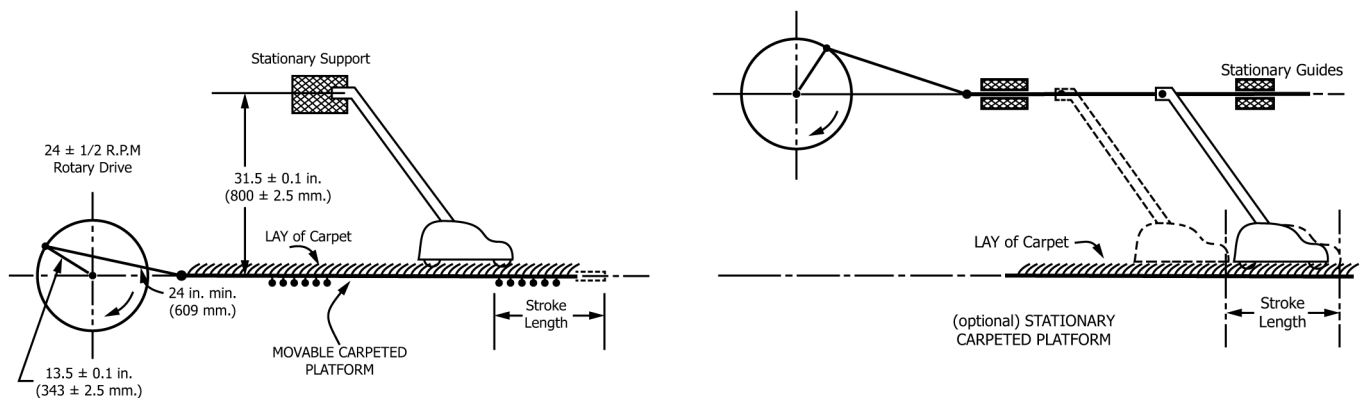


FIG. 1 Test Fixture