



Standard Specification for Body Protectors Used in Equine Racing¹

This standard is issued under the fixed designation F2681; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

INTRODUCTION

Equine racing is a sport with intrinsic hazards. It is recognized that serious injury or death can result from both low-energy and high-energy impacts, even when body protectors are worn. It is also recognized that body protection must be acceptable for the sport, the user, and to the regulating associations or agencies requiring their use. This specification has been developed with an emphasis on providing comfortable, nonrestrictive impact protection in a lower weight garment. Injuries will not be prevented by protective padding in accidents involving severe torsion, flexion or crushing of the body. Acknowledging these limitations, this specification was developed using resources in the medical, scientific, engineering, human factors, and biomedical fields, as well as resources from equine competitors and professional Standardbred drivers and Thoroughbred jockeys. This specification draws from work done by others where appropriate for this specification, and these standards may be referenced. It should be noted that this specification specifies a laboratory test of a completed body protector's ability to reduce impacts.

1. Scope

1.1 This specification covers minimum performance criteria and describes test methods for body protectors for use in equine racing in a controlled environment.

NOTE 1—It is recognized that it is not possible to write a body protector performance standard that will result in products that can protect against all types of injury or death in an accident.

1.2 It is not the intention of this specification to bar from consideration materials of improved quality or performance not known at time of development of this specification.

1.3 The values stated in SI units are to be regarded as standard. No other units of measurement are included in this standard.

1.4 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.5 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the*

Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.

2. Referenced Documents

2.1 *ASTM Standards:*²

F1446 Test Methods for Equipment and Procedures Used in Evaluating the Performance Characteristics of Protective Headgear

2.2 *BSI Standards:*³

EN 13158:2000 Protective clothing – protective jackets, body and shoulder protectors for horse riders – Requirements and test methods

2.3 *SAE Standards*⁴

SAE J211 Recommended Practice for Instrumentation for Impact Tests – Requirements for Channel Class 1000

3. Terminology

3.1 *Definitions of Terms Specific to This Standard:*

3.1.1 In addition to terms defined in Test Methods **F1446**, the following terms are specific to this specification.

¹ This specification is under the jurisdiction of ASTM Committee **F08** on Sports Equipment, Playing Surfaces, and Facilities and is the direct responsibility of Subcommittee **F08.55** on Body Padding.

Current edition approved Aug. 1, 2023. Published August 2023. Originally approved in 2008. Last previous edition approved in 2018 as F2681 – 18. DOI: 10.1520/F2681-18R23.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ Available from British Standards Institute (BSI), 389 Chiswick High Rd., London W4 4AL, U.K., <http://www.bsi-global.com>.

⁴ Available from Society of Automotive Engineers (SAE), 400 Commonwealth Dr., Warrendale, PA 15096-0001, <http://www.sae.org>.

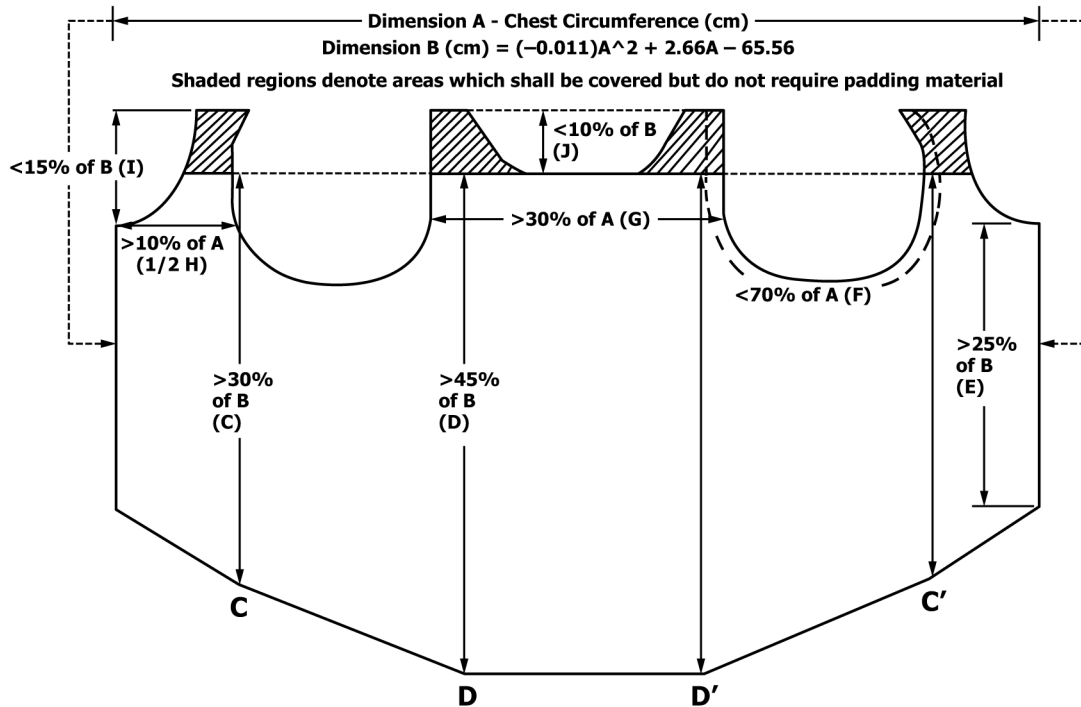


FIG. 1 Dimensional Coverage Requirements

3.1.2 *body protector, n*—sleeveless garment covering defined areas of the torso and lower back and consisting of one or more layers of material and designed to reduce trauma from impacts and falls.

3.1.3 *calibration impact surface, n*—flat modular elastomer programmer (MEP), as specified in Test Methods F1446.

3.1.4 *equine racing, n*—any event or activity on a flat dirt, grass, or synthetic surface track that emphasizes the horse's and rider's or driver's ability to complete a designated distance or course in as short a time as possible (for example, Standardbred, Thoroughbred, and Quarter Horse racing).

3.1.5 *impact surface, n*—flat anvil, as specified in the Apparatus section of Test Methods F1446, used as the impact surface for the shock attenuation test (see 7.2).

3.1.6 *padding, n*—any material or structure designed to absorb or distribute, or both, impact energy.

3.1.7 *spherical impactor, n*—spherical impactor, as specified in Test Methods F1446, used for the impact attenuation system check (see 10.1) and impact test procedures (see 11.2).

4. Materials and Manufacture

4.1 Materials:

4.1.1 All materials used in the fabrication of the body protector shall be known as suitable for the intended application. All padding materials used in the body protector shall not permanently distort during an exposure of at least 4 h to any temperature in the range from -15 ± 2 to $40 \pm 2^\circ\text{C}$, nor shall the material be significantly affected by exposure to ultraviolet radiation, water, dirt, or vibration.

4.1.2 Materials coming into contact with the wearer's skin shall not be a type known to cause skin irritation or diseases.

These materials shall not undergo significant loss of strength, flexibility, or other physical change as a result of contact with perspiration or body oil. Any material used in the construction of body protectors shall not be adversely affected by ordinary household soap and water, mild household detergent, or cleaners recommended by the manufacturer.

4.1.3 Adhesive materials used to attach padding or straps to the body protector shall be of a formulation that will not alter the chemical or physical properties of the materials to an extent as to reduce their protective qualities.

4.1.4 The manufacturer of the body protector shall provide written documentation to the testing laboratory indicating that the materials used in the body protector fulfill the requirements of 4.1.1 – 4.1.3.

4.2 Body Protector Assembly:

4.2.1 Any optional devices provided by the manufacturer of the body protector and fitted to the body protector shall be so designed that they are unlikely to cause any injury to the wearer or other participants during contact. If the manufacturer provides optional devices then the body protector shall be tested with the optional devices fitted to the body protector.

4.2.2 Any unfaired projection extending more than 7 mm from the body protector outer surface shall break away or collapse when impacted with forces equivalent to those produced by the impact tests described in 11.2 of this specification. There shall be no fixture on the inner surface of the body protector projecting more than 2 mm from the inner surface of the body protector toward the wearer's body.

4.3 *Extent and Form of Padding*—The coverage of the body protector listed in Section 6 shall be capable of being evaluated according to 11.2 and shall meet the impact requirements of