

INTERNATIONAL ELECTROTECHNICAL COMMISSION
COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

IEC 62271-202
Edition 2.0 2014-03

IEC 62271-202
Édition 2.0 2014-03

High-voltage switchgear and controlgear –
Part 202: High-voltage/low-voltage prefabricated
substation

Appareillage à haute tension –
Partie 202: Postes préfabriqués haute
tension/basse tension


C O R R I G E N D U M 1

Corrections to the French version appear after the English text.

Les corrections à la version française sont données après le texte anglais.

Figure AA.6 – Selection of tests on high voltage interconnections for class IAC-A

Replace the existing figure by the following new figure:

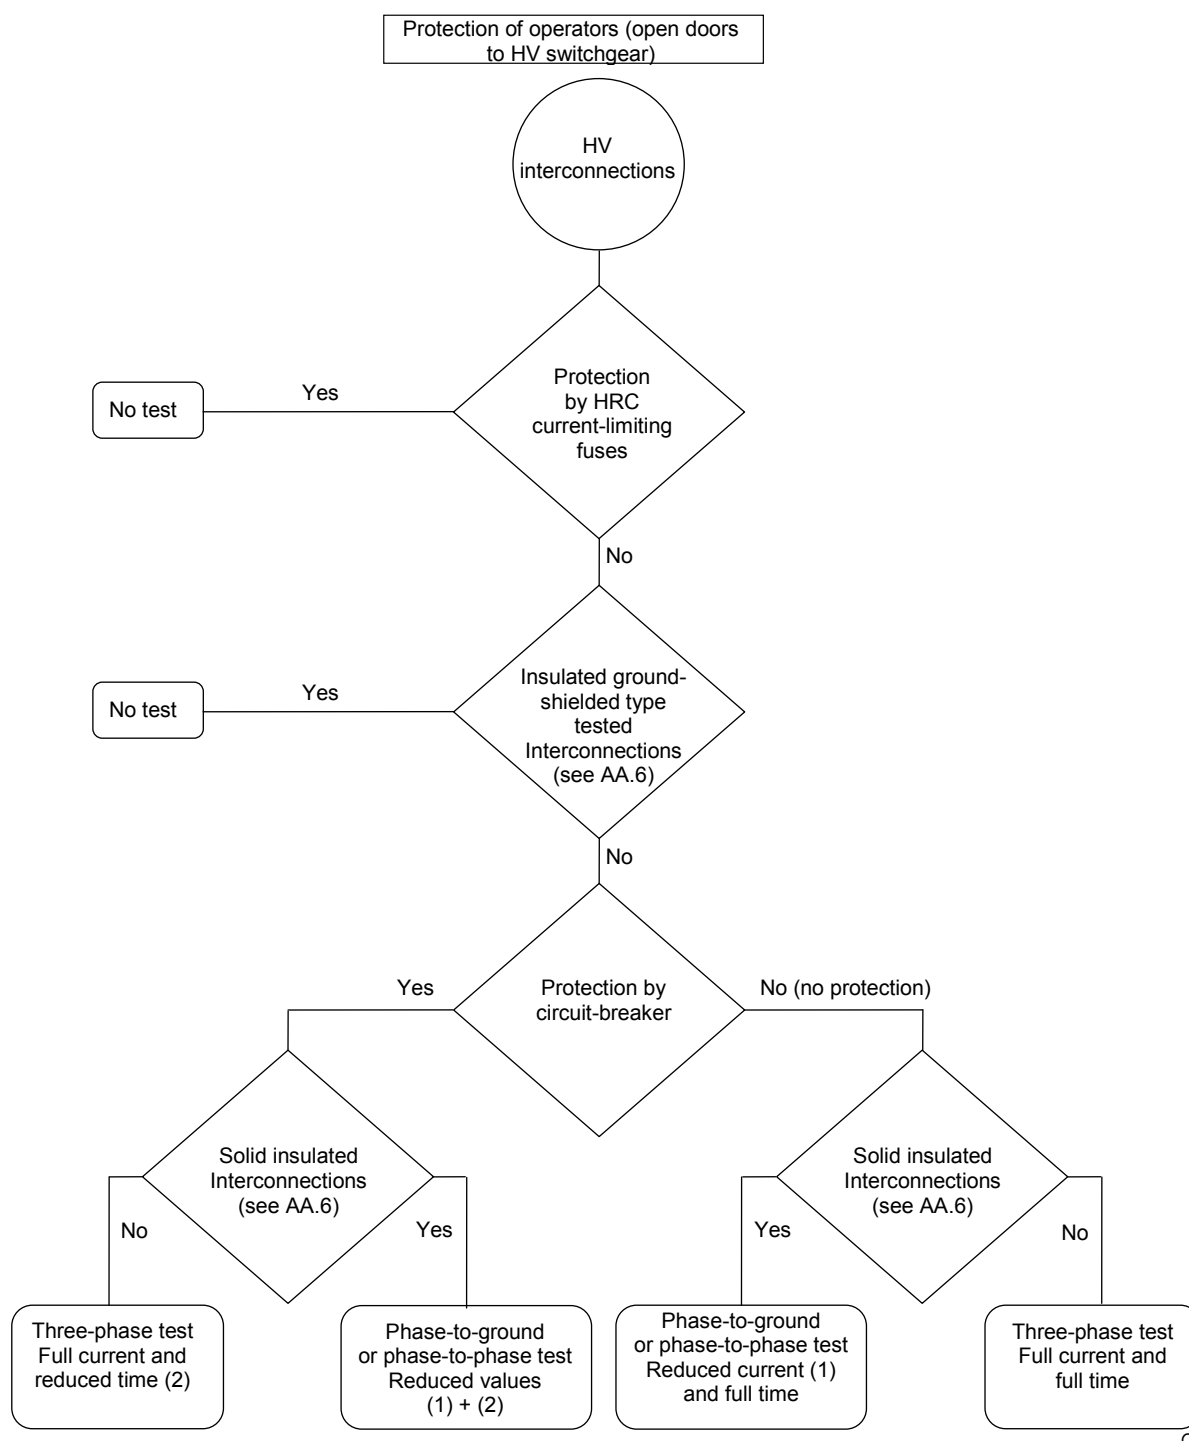

(1) IEC 62271-200:2011.

* For phase to ground test the current value to be stated by the manufacturer.

* For phase to phase test the current will be 87 % of the rated short-time withstand current.

(2) The time may be stated by the manufacturers, taking into account the time-setting of the protection.

Figure AA.6 – Selection of tests on high voltage interconnections for class IAC-A