



Designation: D3850 – 25

Standard Test Method for Rapid Thermal Degradation of Solid Electrical Insulating Materials By Thermogravimetric Method (TGA)¹

This standard is issued under the fixed designation D3850; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

This standard has been approved for use by agencies of the U.S. Department of Defense.

1. Scope

1.1 This test method outlines a procedure for obtaining thermogravimetric (TGA) data on solid polymeric materials intended for use as electrical insulating materials.

1.2 Do not use this standard to quantify an estimate of the long-term thermal capability for any electrical insulating material. If a relationship exists between TGA and the long-term thermal capabilities of a material, then that fact must be established and made public, preferably by comparing data between a candidate and another material known to display similar failure modes.

1.3 The values stated in SI units are the standard.

1.4 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.5 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 *ASTM Standards:*²

D883 Terminology Relating to Plastics

D1600 Terminology for Abbreviated Terms Relating to Plastics (Withdrawn 2024)³

¹ This test method is under the jurisdiction of ASTM Committee D09 on Electrical and Electronic Insulating Materials and is the direct responsibility of Subcommittee D09.17 on Fire and Thermal Properties.

Current edition approved Sept. 1, 2025. Published September 2025. Originally approved in 1979. Last previous edition approved in 2019 as D3850 – 19. DOI: 10.1520/D3850-25.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at www.astm.org/contact. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ The last approved version of this historical standard is referenced on www.astm.org.

D1711 Terminology Relating to Electrical Insulation
D2307 Test Method for Thermal Endurance of Film-Insulated Round Magnet Wire
E220 Test Method for Calibration of Thermocouples by Comparison Techniques
E473 Terminology Relating to Thermal Analysis and Rheology
E1582 Test Method for Temperature Calibration of Thermogravimetric Analyzers

3. Terminology

3.1 *Definitions*—Definitions are in accordance with Terminology D883, Terminology D1711, and Terminology E473.

3.2 *Abbreviations*—Abbreviations are in accordance with Terminology D1600, unless otherwise indicated.

4. Summary of Test Method

4.1 This thermogravimetric technique uses the record of the mass loss versus the temperature of the specimen during the time of exposure to a specified prescribed environment using a controlled time rate of heating.

4.2 The record is a TGA curve, with percent of initial mass as the ordinate and temperature as the abscissa (see Figs. 1 and 2).

4.3 The temperature is measured and recorded at specified mass loss points (recorded as a TGA curve), using an electronic chart recorder or other suitable data acquisition device.

5. Significance and Use

5.1 Thermogravimetry is useful in determining the dynamic functional effect of temperature on the amount of volatile materials leaving a specimen as the latter is heated progressively to higher temperatures. TGA is useful for process control, process development, material evaluation, and for identification and quality control in specifications.

5.2 The thermal stability of a material is often associated with the degree and time rate of mass loss as a function of temperature. In these cases, TGA curves are available to be

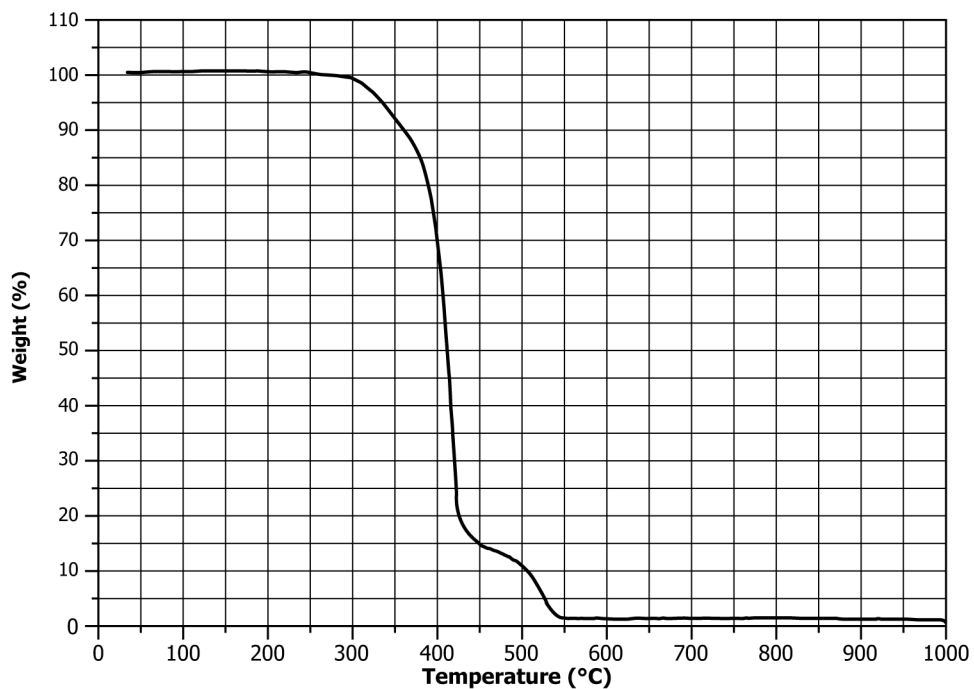


FIG. 1 Curve No. 1, Typical TGA for Polyester Film

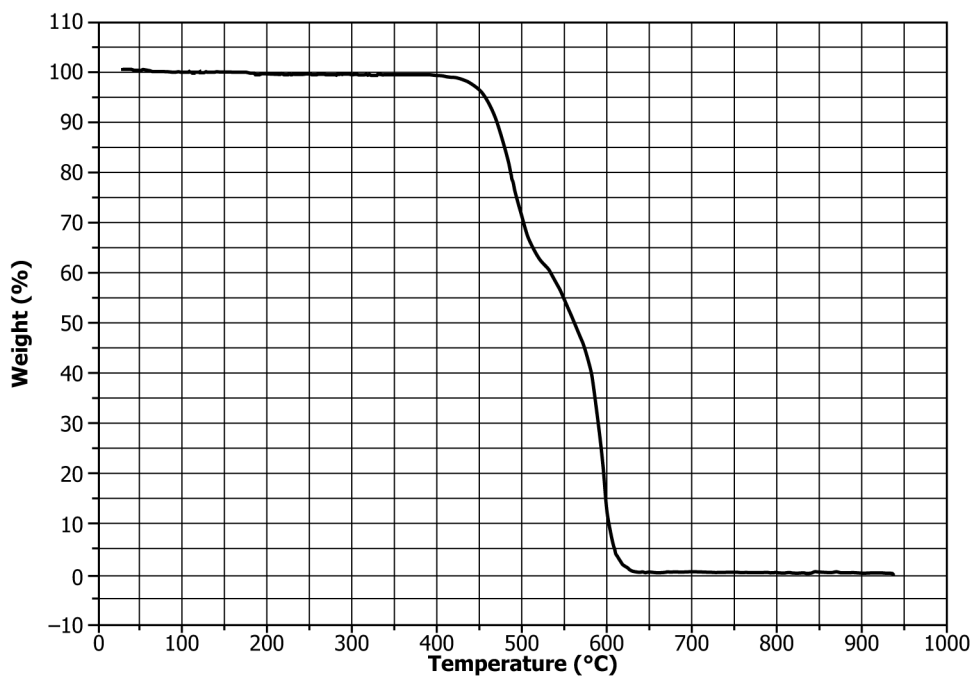


FIG. 2 Curve No. 2, Typical TGA for Polyimide Film