



Standard Test Method for Impact Resistance of Poly(Vinyl Chloride) (PVC) Rigid Profiles by Means of a Falling Weight¹

This standard is issued under the fixed designation D4495; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope*

1.1 This test method covers the determination of the energy required to crack or break rigid poly(vinyl chloride) (PVC) profile under specified conditions of impact by means of a falling weight.

1.2 This test method is used either by itself or in conjunction with other methods for measuring PVC product toughness.

1.3 Because of the wide variety of profile sizes and shapes and the wide variety of manufacturing procedures and field abuse, this test method does not correlate universally with all types of abuse. Therefore, correlations must be established as needed.

1.4 The text of this standard references notes and footnotes which provide explanatory material. These notes and footnotes (excluding those in tables and figures) shall not be considered as requirements of this standard.

1.5 The values stated in inch-pound units are to be regarded as the standard.

1.6 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

NOTE 1—There is no known ISO equivalent to this standard.

1.7 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

¹ This test method is under the jurisdiction of ASTM Committee D20 on Plastics and is the direct responsibility of Subcommittee D20.24 on Plastic Building Products.

Current edition approved Dec. 1, 2021. Published December 2021. Originally approved in 1985. Last previous edition approved in 2016 as D4495 – 16. DOI: 10.1520/D4495-21.

2. Referenced Documents

2.1 *ASTM Standards*:²

D618 Practice for Conditioning Plastics for Testing

D883 Terminology Relating to Plastics

E178 Practice for Dealing With Outlying Observations

3. Terminology

3.1 *Definitions*—Definitions are in accordance with Terminology D883, unless otherwise indicated.

3.2 *Definitions of Terms Specific to This Standard*:

3.2.1 *failure*—the presence of a brittle failure readily visible by the naked eye, including a sharp crack, split, or shatter in any part of the profile as a result of the impact of the falling weight. Failure does not include ductile tears (where the surfaces at the tip of the crack have a greater than 0° angle), or ductile breaks (hinged breaks where the cracked part remains joined to the unbroken part throughout the length of the cracked part or section), (Fig. 1).

3.2.2 *mean failure height*—the height from which the falling weight will cause 50 % of the specimens to fail.

3.2.3 *mean failure energy*—energy required to produce 50 % failures. The product of the weight and mean failure height.

3.2.4 *outlier*—an observation that appears to deviate markedly from other members of the sample in which it occurs.

4. Summary of Test Method

4.1 The profile is cut into lengths of at least 6 in. The test method establishes the height from which a standard falling weight will cause 50 % of the specimens to fail.

5. Significance and Use

5.1 The impact strength of PVC profiles relates to suitability for service and to quality of processing. Impact tests are used

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

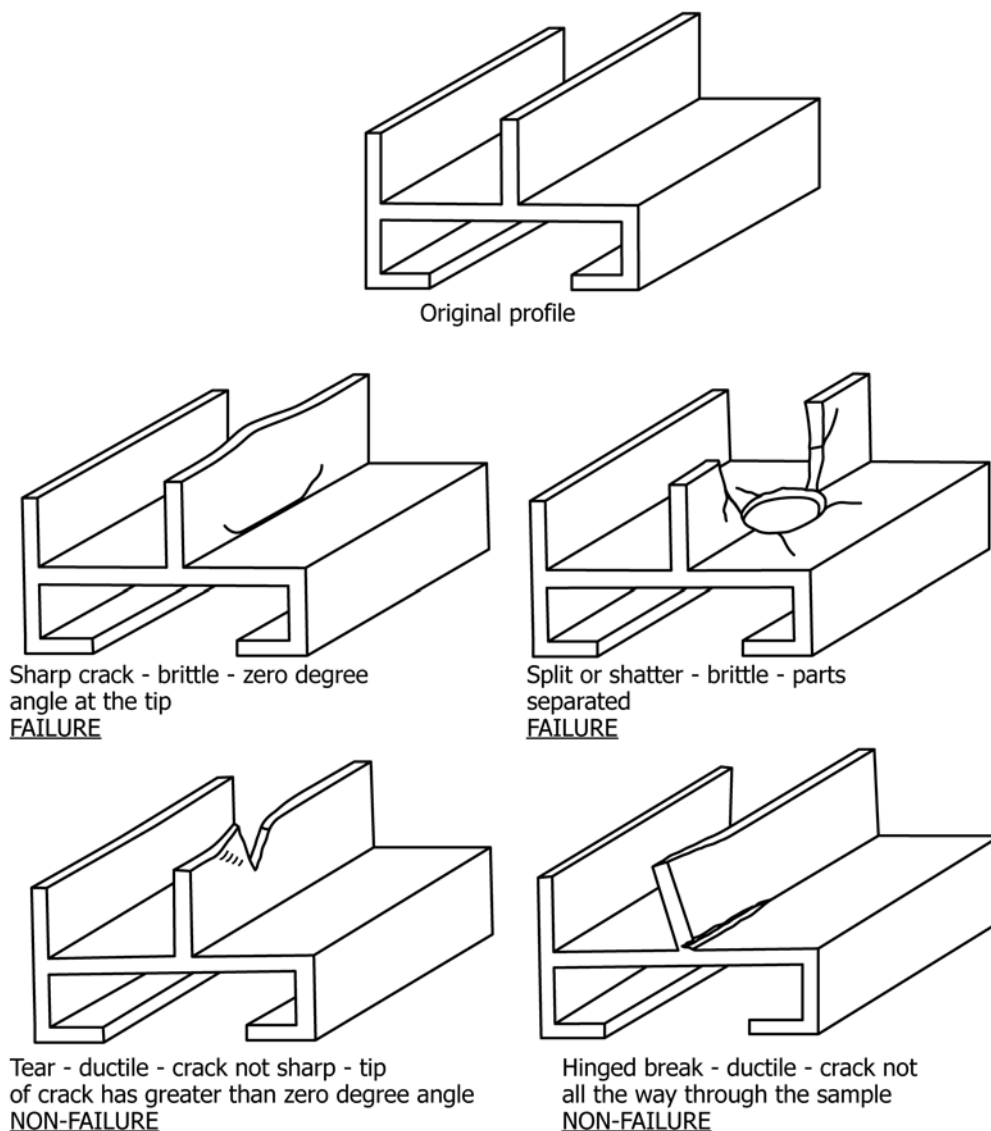


FIG. 1 Types of Breaks

for quality-control purposes and as an indication that products can withstand handling during assembling, installation, or in service.

5.2 Results obtained by use of this test method are used in two ways:

5.2.1 As the basis for establishing impact-test requirements in product standards, and

5.2.2 To measure the effect of changes in materials or processing.

6. Interferences

6.1 Falling-weight-impact types of tests are not suitable for predicting the relative ranking of materials at impact velocities differing greatly from those imposed by these test methods.

6.2 Impact properties of plastic materials can be very sensitive to temperature. This test can be carried out at any reasonable temperature and humidity thus representing actual

use environments. However, this test method is intended primarily for rating materials under specific impact conditions.

6.3 When placed on the support plate, the specimen must lie flat. Bowed samples will affect test results.

7. Apparatus

7.1 *General*—One type of impact tester is illustrated in Fig. 2.

7.2 *Falling Weight*, shall be cylindrical and 2 ½ in. in diameter, with a flat-bottom surface that strikes the test specimen.

NOTE 2—It is suggested that the striking portion of the weight be made of scratch-resistant steel to reduce damage to the striking surface. Badly scarred surfaces may affect test results.

7.2.1 The mass of the falling weight shall be 10 ± 0.5 lb.

7.3 *Drop Tube*, shall be of sufficient length (approximately 12 ft (4 m)) to provide for a fall of at least 10 ft (3 m) and shall